


TERRACOTTA

QUARRY TILES

NATURAL STONE  
AGGLOMERATES  
TUMBLED MARBLE  
GRANITE  
PEBBLES AND  
COBBLESTONES

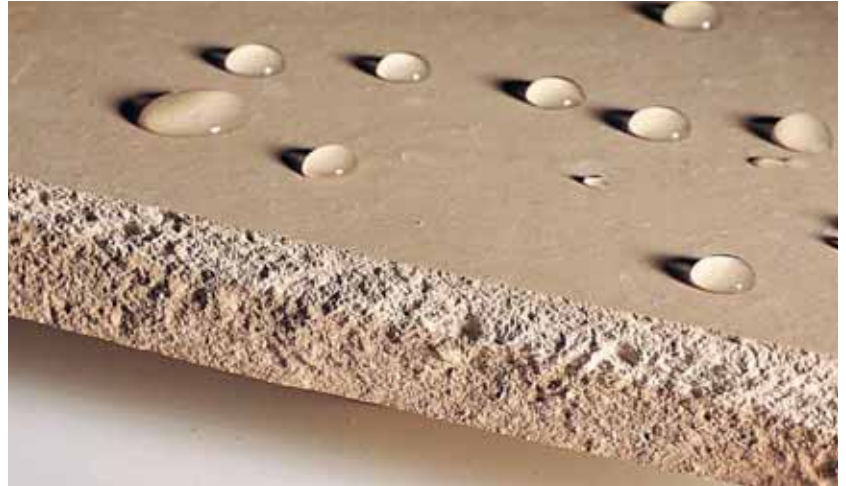

### WHAT IT'S FOR

- Water-based sealer for exterior natural stone and terracotta pavings
- Ideal for interior and exterior walls
- Protects from wear caused by atmospheric agents
- Deeply penetrates the material while still allowing the surface to breathe
- Ideal for treatments prior to grouting

#### Packaging

1 litre flasks in box of 12.  
5 litre flasks in box of 4.

#### PRECAUTIONS

• product not frost resistant in container. Store at room temperature.

#### COMPOSITION

Blend of siloxane compounds dispersed in water.

### ADVANTAGES

- Water-based: it is environmentally friendly and requires shorter treatment time as it can be applied to surfaces still not completely dry
- Prevents efflorescence
- No film forming
- Compatible with traditional wax treatments
- Attractive natural effect: does not alter surface appearance
- Prevents chewing gum from sticking to surfaces
- Does not alter terracotta frost resistance: tested by the Bologna Ceramic Centre

#### COVERAGE

With one litre:

Terracotta	10 m <sup>2</sup>
Stone	25 m <sup>2</sup>

\*Coverage rates are approximate and refer to a single coat of the product\*

#### LABELLING

No risk or safety labels or warnings are required since the product is not classified as hazardous under current regulations.

### HOW IT'S USED

**No dilution:** ready to use

#### Application:

*Stir before use and then spread evenly with a large brush.  
For vertical surfaces, use the airless method. Since it is a water-based product, residual humidity is permissible, so Fila HP98 can be applied just few days after the initial cleaning.  
Apply two or three coats, depending on the surface absorption level, as soon as the surface seems dry  
Two coats: Tuscan terracotta.  
Three coats: Spanish type or hand-made terracotta, sedimentary stones, concrete.  
Either a liquid or paste wax can be applied as a finishing coat*

#### Maintenance:

*diluted solution of FilaCleaner*



#### Caution:

**If used as a basecoat, one coat is sufficient**

#### TECHNICAL INFORMATION

**Appearance:** liquid  
**Colour:** milky white  
**Odour:** distinctive, resinous  
**Density:** 0.996 kg/litre  
**pH:** 6.2

*The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check.*

*Fila accepts no liability for improper use of its products.*